




Molding Power Inductors  
Size 252010




- Generic in portable DC to DC converter line.
- Smart phone, PAD
- DC/DC converter
- Thin-type power supply module.

Dimensions: [mm]




Land Pattern: [mm]




Electrical Properties:

|  | Inductance<br>@ 1MHz/1V | Tolerance | DC<br>Resistance<br>Typ. | DC<br>Resistance<br>Max. | Current<br>Typ. | Current<br>Max. | Temperature<br>Rise Current<br>Typ. | Temperature<br>Rise Current<br>Max. |
|--|-------------------------|-----------|--------------------------|--------------------------|-----------------|-----------------|-------------------------------------|-------------------------------------|
|  |                         | ±20%      | 9                        | 12.5                     | 7.9             | 7.20            | 5.90                                | 5.30                                |
|  |                         | ±20%      | 21                       | 26.0                     | 6.6             | 6.00            | 4.40                                | 4.00                                |
|  |                         | ±20%      | 27                       | 32.0                     | 5.0             | 4.50            | 3.90                                | 3.51                                |
|  |                         | ±20%      | 37                       | 44.0                     | 4.3             | 3.87            | 3.40                                | 3.06                                |
|  |                         | ±20%      | 45                       | 54.0                     | 3.5             | 3.15            | 3.00                                | 2.70                                |
|  |                         | ±20%      | 76                       | 91.0                     | 2.6             | 2.34            | 2.50                                | 2.25                                |
|  |                         | ±20%      | 99                       | 119                      | 2.4             | 2.16            | 2.30                                | 2.07                                |
|  |                         | ±20%      | 220                      | 262                      | 1.8             | 1.62            | 1.36                                | 1.22                                |

## Typical Electrical Characteristics:

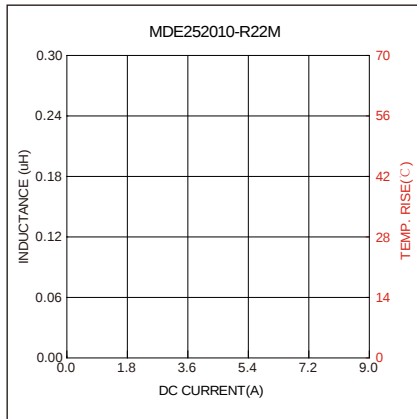

Soldering Reflow:

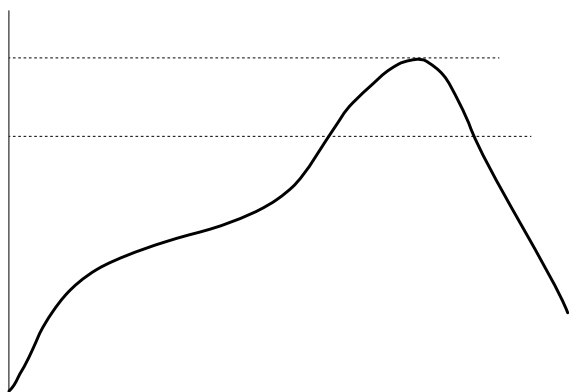


Preheat condition: 150 ~200 °C / 60~180 sec.  
Allowed time above 217 °C : 60~150 sec.  
Max temperature: 260 °C .

Packaging Information:


Tape Dimension :

Peel force of top cover tape:

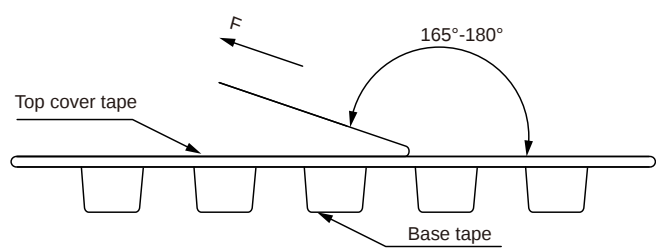


The peel force of top cover tape shall be between 0.1 to 1.3 N

## Reel Dimension: [mm]

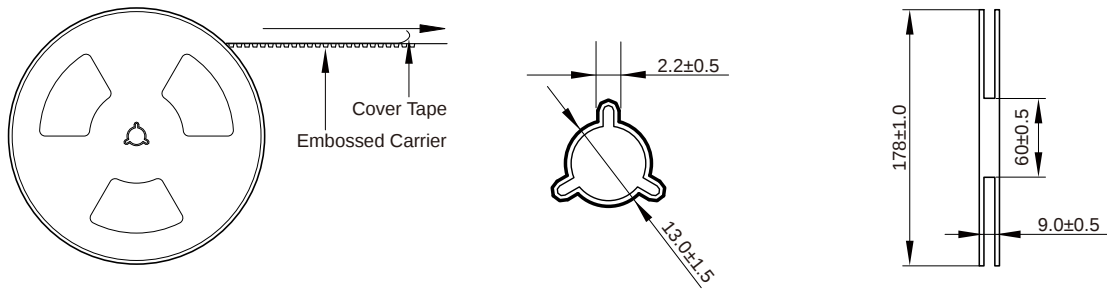

## Packaging Quantity:

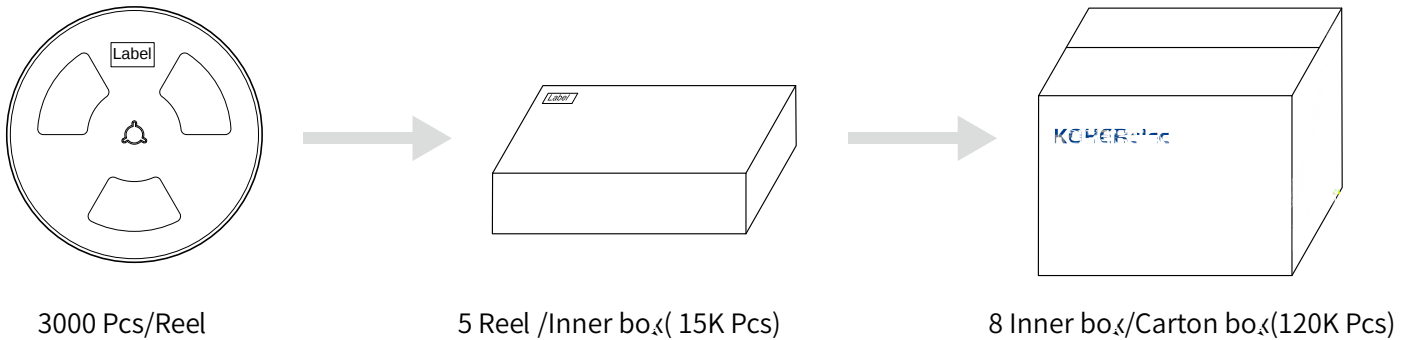

## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.