


ISAT !mupl\$S' u'1\$ Oñeo\$Qúu' u'ú Oñu\$P' u'1\$ Qñ\$SñO'úO'QO\$S' O'1'Q' u'1\$ P'P' Q'S' P\$Q\$S' u'1'Q' u'ú QñQ'P' P' Q'Pñ\$
 !P'Qñ\$Qúu' u'S\$P\$Q\$S' u'úOñ\$ / / u'1\$ P' u'úu' u'S\$P\$Q\$S' u'úOñ\$ P'P'Qñ\$Qúu' u'S\$P\$Q\$S' u'úOñ\$ P'ñ'Q\$S'P' u'1\$ Qñ\$Q\$S' u'1'Q' u'ú P'1\$P' u'1' u'úP'P' Q'S' Qñ\$Q\$S' /
 !P'Qñ\$Qúu' u'S\$P\$Q\$S' u'úOñ\$ / u'1\$ P' u'úu' u'S\$P\$Q\$S' u'úOñ\$ P'P'Qñ\$Qúu' u'S\$P\$Q\$S' u'úOñ\$ P'ñ'Q\$S'P' u'1\$ Qñ\$Q\$S' u'1'Q' u'ú P'1\$P' u'1' u'úP'P' Q'S' Qñ\$Q\$S' /




Soldering Reflow:

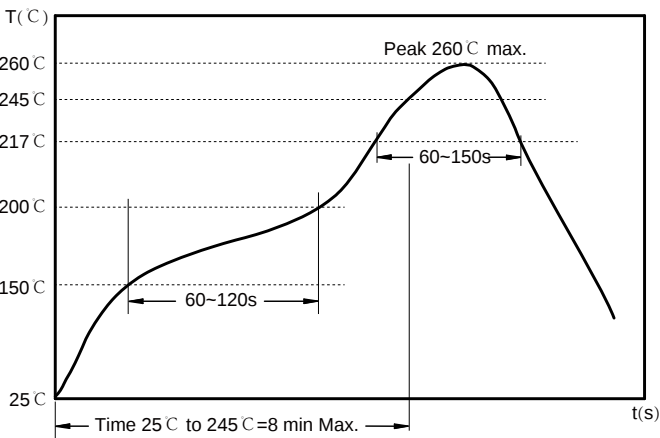

Preheat condition: 150 ~200 °C / 60~120 sec.
Allowed time above 217 °C : 60~150 sec.
Max temperature: 260 °C .
Allowed Reflow time: 3x max.


Packaging Information:

Tape Dimension:

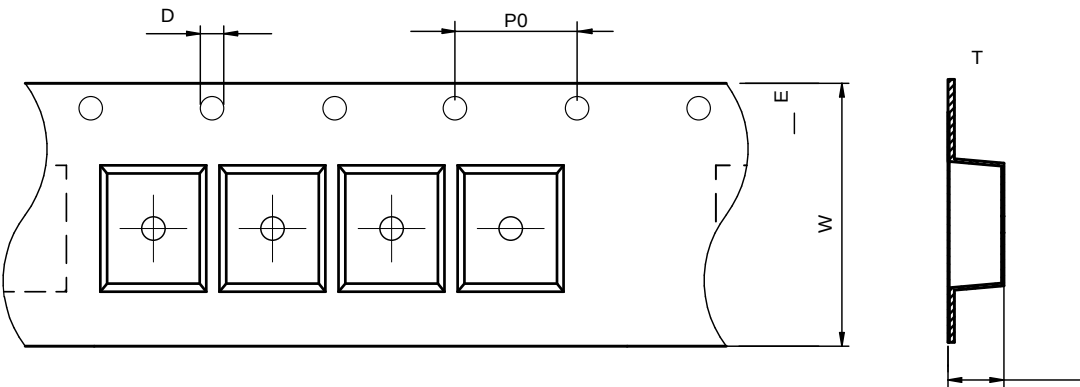

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
ACMA3225 †	2N... ′	3⅞ ± ′	1⅞ ± †	⅞ “4⅞ ′	4⅞ ′	8⅞ ′	2N... ± †	⅞ 1N... ± †	⅞ ⅞ „ ′




Peel force of top cover tape:

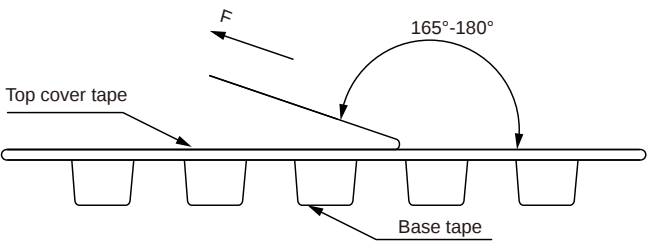


The n orce n op n ove ⊥ n a etwe Δ ⊥ n o >



Reel Dimension: [mm]

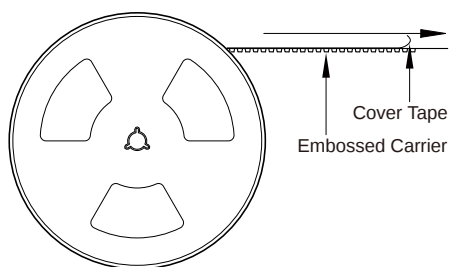

Packaging Quantity:



1500 Pcs/Reel

5 Reel /Inner box(7.5K Pcs)

8 Inner box/Carton box(60K Pcs)

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.