

4A Series

Chip Ferrite Bead SMD Type Size 0805




FEATURES

- E]]• Ą μ Ÿ}v • }oμŸ}v (}Ą P v Ą o •]Pv o
 ▪ s Ą]]μ• (Ą <μ v Ć Z Ą š Ą].Ÿ • Á]šZ î u
]+ Ą vš (šμĄ • (}Ą]μvš Ąu • μĄ • P
 šZ]vP (Ą}u P v Ą o •]Pv o • š} Z]PZr•%
 ▪ rYîîî <μ o].
 ▪ K%œ ŸŸP š u%œ Ą šuĄ WrññĚšš = íññĚ
 ▪ ä 0 1 2 3 4 5 6 7 8 9 % & ' () * + , - . / : ; < = > ? [\] ^ _ ` { | } ~ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ® ¯ ° ± ² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É Ê Ë Ì Í Î Ï Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â ã

APPLICATION

Dimensions: [mm]

Land Pattern: [mm]


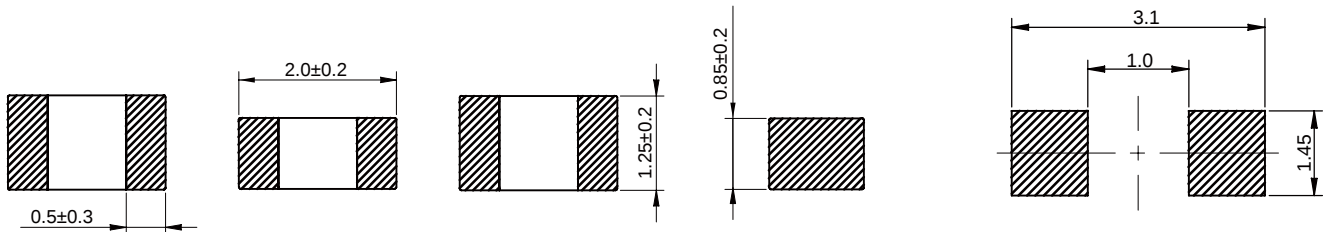


Electrical Properties:

[illegible]



Typical Electrical Characteristics:

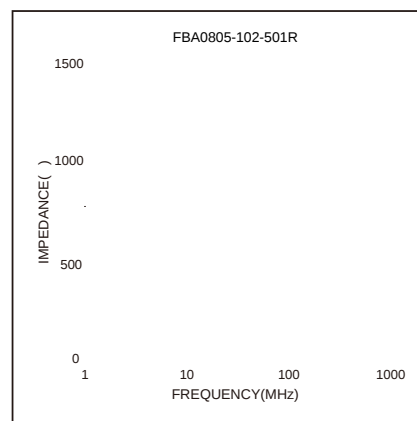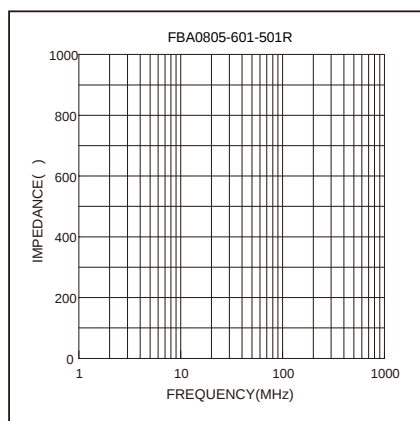


Soldering Reflow:




Packaging Information:

Tape Dimension :

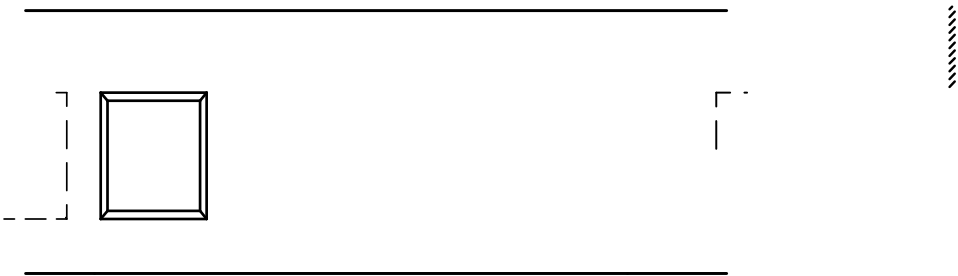

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05


Peel force of top cover tape:

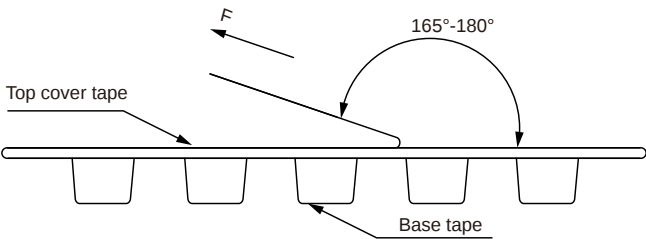

The peel force of top cover tape shall be between 0.14 to 0.58 N



Reel Dimension: [mm]

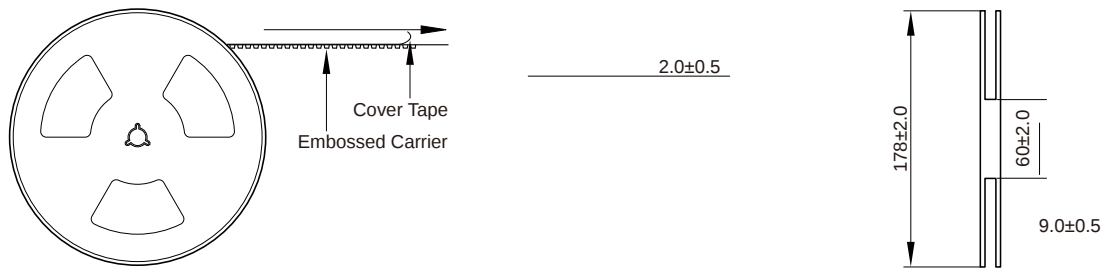

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.