

FBHA S Series

Chip Ferrite Bead High Current Type
Size 1206




FEATURES

-
- Compa
-
-
-
- Quan ty: 3000pcs


APPLICATION

- Power line filter for body controls, and car mul media etc.

Dimensions: [mm]

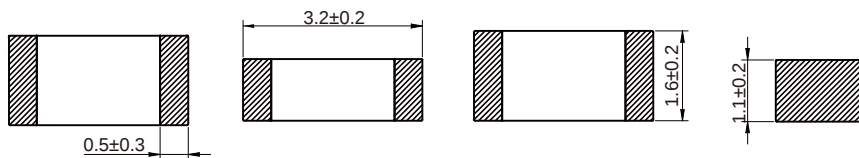

Land Pattern: [mm]











Electrical Properties:

Part No	Impedance @ 100MHz	Tolerance	DC Resistance Max.	Temperature Rise Current Max.
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		
		0%		

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

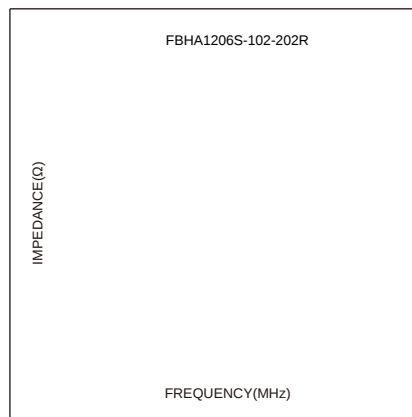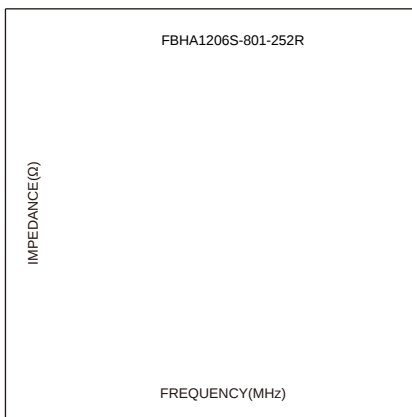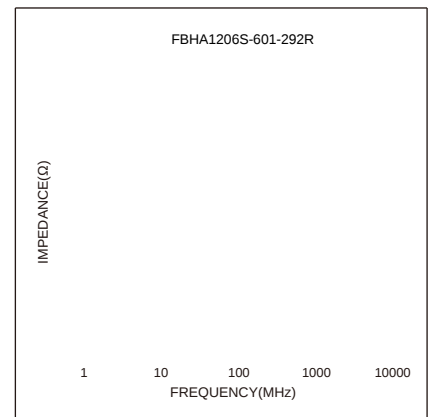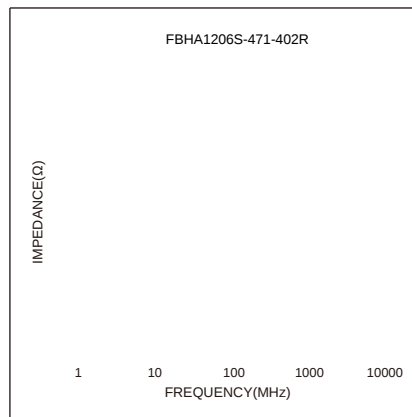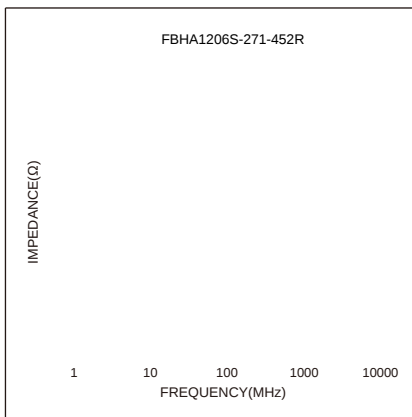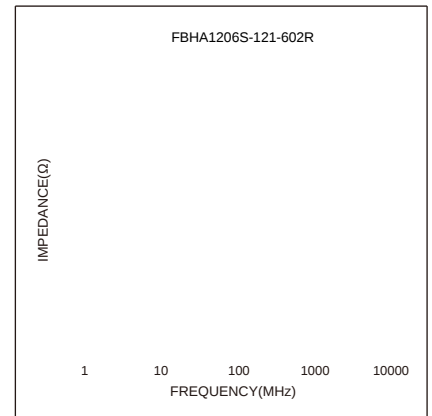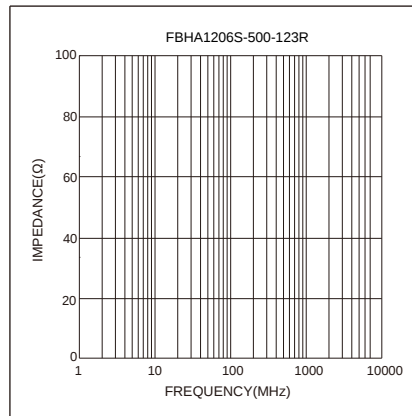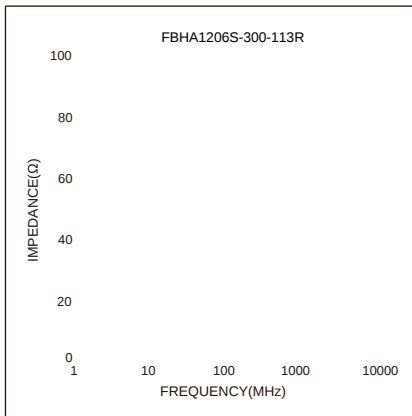


Soldering Reflow:

Packaging Information:

Tape Dimension :



Peel force of top cover tape:

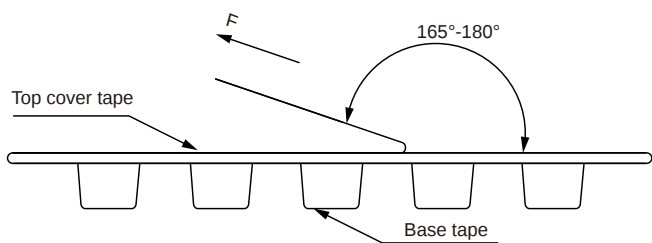

CAFK CA

Reel Dimension: [mm]

