



FEATURES

- Shielded construction
-
-
- Ultra low buzz noise, due to composite construction.
-
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 1000PCS





APPLICATION




- Headlamps, tail lamps and interior lighting
-
- Doors, window lift and seat control
-
- In-Vehicle Infotainment and navigation




	(μH)				Saturation	Saturation	(mΩ)	(mΩ)


[illegible]

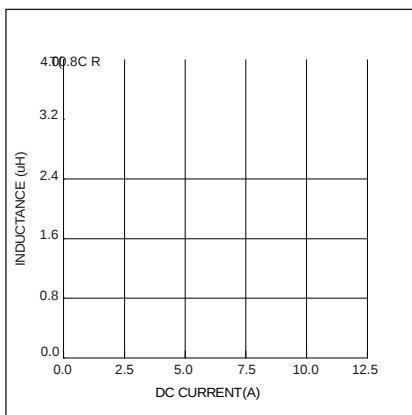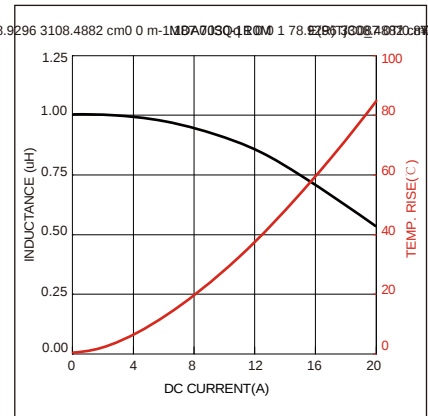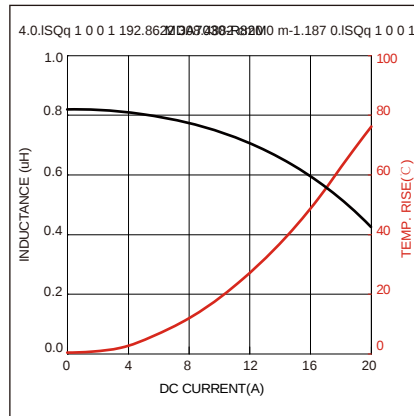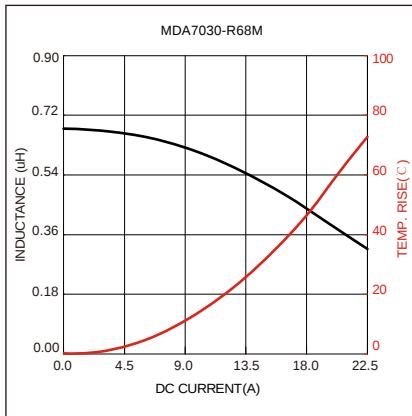

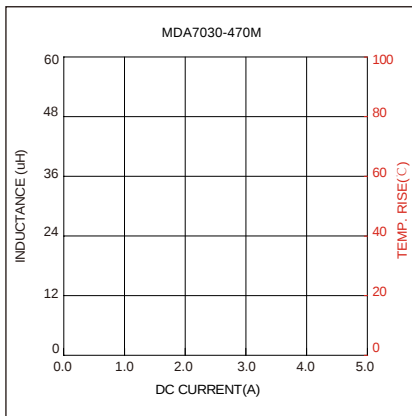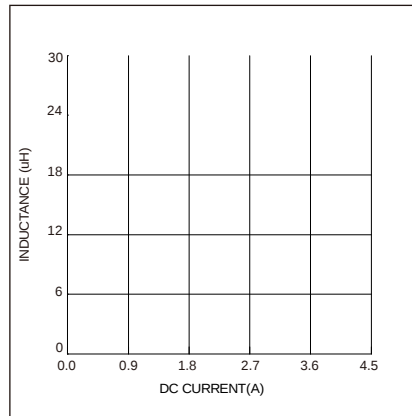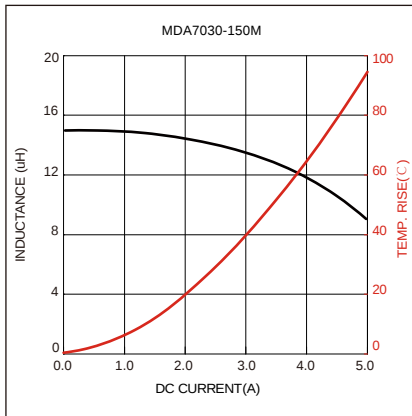




Reel Dimension: [mm]

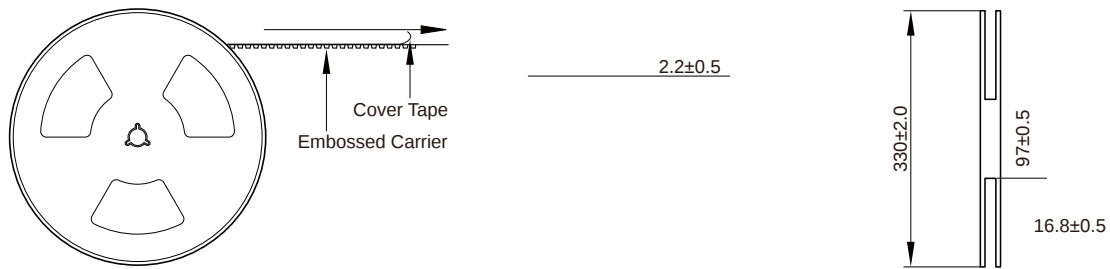

Packaging Quantity:



1000 Pcs/Reel

2 Reel /Inner box(2000 Pcs)

3 Inner box/Carton box(6K Pcs)

Cautions and Warnings:

Storage Conditions:

Operation Instructions: