


Dimensions: [mm]


[illegible]




Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)

Typical Electrical Characteristics:

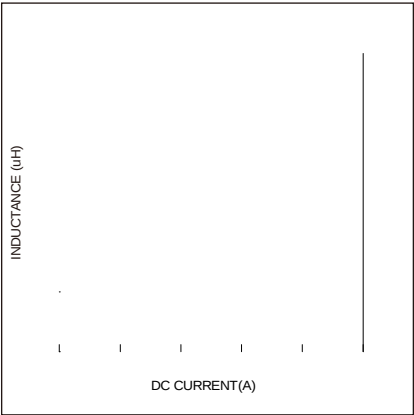

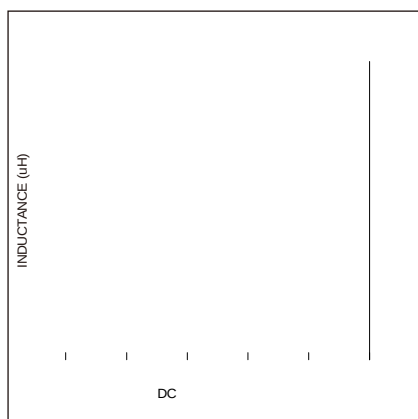

Soldering Reflow:

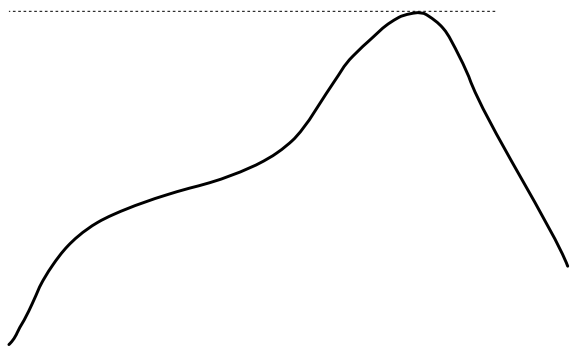


Preheat condition: 150 ~200℃ / 60~120 sec.
Allowed time above 217℃ : 60~90 sec.
Max temperature: 260℃ .

Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension :

Peel force of top cover tape:

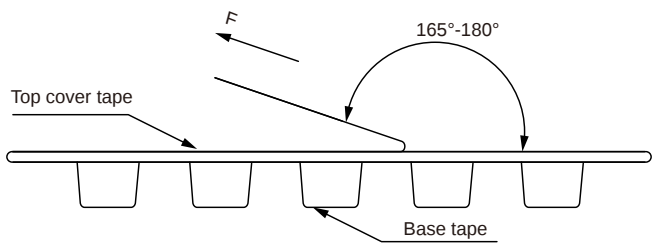


The peel force of top cover tape shall be between 0.1 to 1.3 N


Product Marking:

Marking	K+Printing (Inductance+period)
---------	--------------------------------


Reel Dimension: [mm]

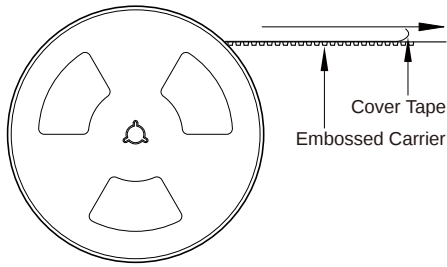

2.2±0.5



Packaging Quantity:



800 Pcs/Reel

2 Reel /Inner box(1600 Pcs)

3 Inner box/Carton box(4.8K Pcs)

Cautions and Warnings:

Storage Conditions :

Operation Instructions: ~~Q&A~~ Q&A?