

MDCA Series





FEATURES

- Shielded construction.
- Capable of corresponding high frequency.
- Low loss realized with low DCR.
- High performance (Isat) realized by Carbonyl Powder.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +125 °C(including self-temperature rise)
- Quantity: 500pcs

APPLICATION


- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation

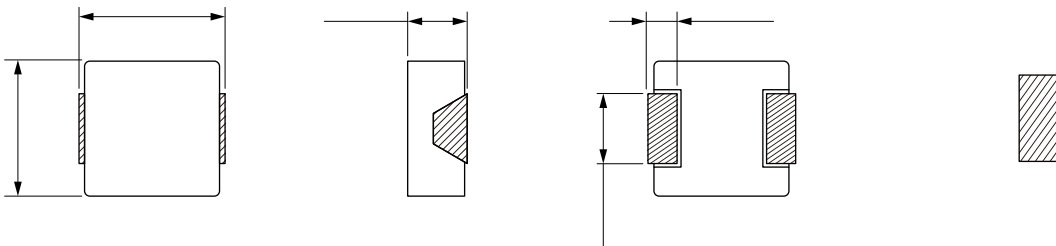



C
C
C

:

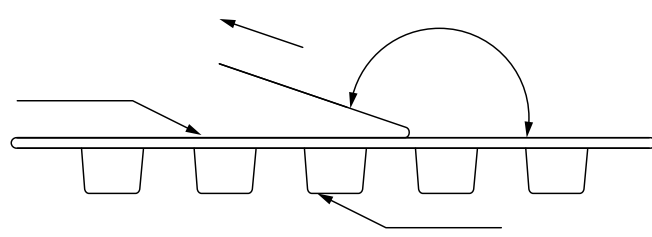

Rfc nccj dmpac md rmn amtcp r_nc qf_jj `c `cruccI .,/ rm /,1 L

K_pigle	Npglrgle Glbsar_lac'
---------	----------------------

