



- -
 -
 -
 -
 -
 -
- Frequency up to 3 MHz
125 °C maximum total temperature operation
- Low core loss
 - Ultra low buzz noise due to molding construction
 - Halogen Free & ROHS compliant
 -
 -
 -

Switch and servers

Base stations

DC/DC converters

Battery powered	
-----------------	--


SSD modules

0.0 ± 0.0

[illegible]

Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

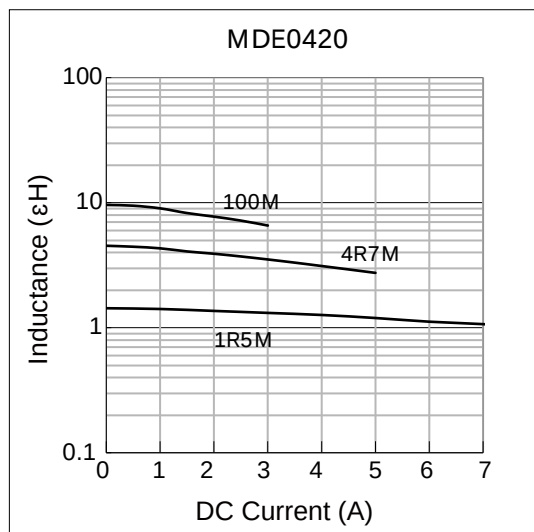

Temperature Rise vs DC Current Characteristics:

