

MDTA Series

Flat Wire Molded Inductor

Size 6060


FEATURES

- Flat wire coil for low copper losses
- / 0Ψμ0σ000Ψ 000Ψ Ψ000000P 0PP0Xσ 00°0 σ00000000 00000000
- 300bl P0X 0000σ00 0000σ 0000 0000bl P0X P0000°0 0000 0000σ
- High current c00000000 0000 00000000 0000 00000000 0000 00000000 0000 00000000
- AE/ v 00000000
-
-


APPLICATION

-
-

Dimensions: [mm]

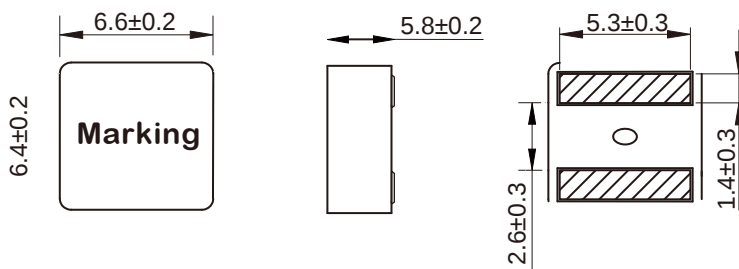


Land Pattern: [mm]



Electrical Properties:

Reel Dimension: [mm]

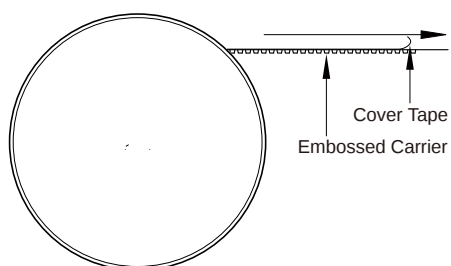

Packaging Quantity: