MDTA Series

Flat Wire Molded Inductor

Size 7030

FEATURES

-
-
-
-
-
-
- ℃

APPLICATION

-
-

Dimensions: [mm]

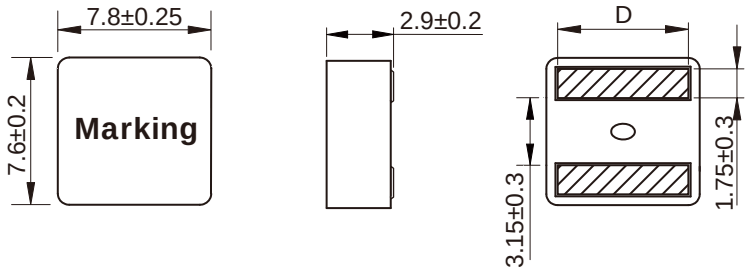

Land Pattern: [mm]



Electrical Properties:

Part No	L@100KHz /0.1V (μH)	Tolerance	I_{SAT} Typ. (A)	I_R (A)		R_{DC} Max. (mΩ)	D (mm)
				20°C rise	40°C rise		

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current that causes the specified temperature rise from 25°C ambient.

KOHER Electronic

4546 BATES DRIVE, YORBLINDA CA 92886 USA

714-325-4789 Contact@kohergroup.com

Reel Dimension：[mm]

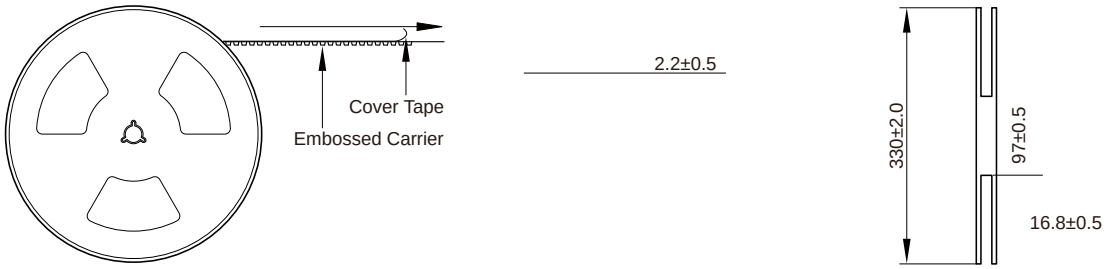

Packaging Quantity:

1500 Pcs/Reel

2 Reel /Inner box(3000 Pcs)

3 Inner box/Carton box(9K Pcs)

Cautions and Warnings:

Storage Conditions：

-
-
-
-

Operation Instructions:

-
-
-
-