

THC Series
SMD High Current Inductor
Size 2015

CHARACTERISTICS


- I лЭК äт-űdzNłт-ə2γŎdzNłNŠyű dzLJ ũ2 млл !
- [2đ t2ăăŠă đłúK bl-ű đłNłŠ ŘŠăłЭγ
- [2đ Ŏ2NłŠ t2ăăŠă đłúK aγŦγŎ2NłŠ Yт-űŠNłłт
- vdzтγəűēY мллLJŎă

APPLICATION

- I лЭК ŎdzNłNŠyű 5 / κ5 / Ŏ2γđŠNłűŠNł
- [/ ŬťűŠNł

Dimensions: [mm]

Land Pattern: [mm]

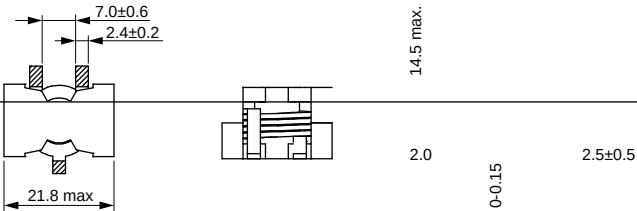

Electrical Properties:

hLJŠNłт-əγЭ đŠYłJŠNłт-űdzNłŠY ππл °C ũ2 Ъмнр °C
đŠYłJŠNłт-űdzNłŠ włăŠ / dzNłNŠyűű ũKŠ т-űűdzт-т đт-тđš 2т 5 / ŎdzNłNŠyű đKŠyűKŠ ũŠYłJŠNłт-űdzNłŠ NłăŠ lă пϢπл °C
{т-űdzNłт-ə2γ / dzNłNŠyű ũKт-ű đłť đт-đăŠ łγłəт-т łγŘđzŎűт-γŎŠ ũ2 Řł2LJ т-LJLJNł2ĚłYт-űŠťē нтĚă

Typical Electrical Characteristics:

