




Part No	Inductance (uH)	Tolerance	Test Frequency (Hz)	Q Min.	Test Frequency Q (MHz)	Temperature Rise Current Max. (mA)	DC Resistance Max. (Ω)	SRF Min. (MHz)
WIV3225-101K	100	±10%	0.5V/1M	10	1.00	190	3.48	7.0
WIV3225-151K	150	±10%	0.5V/1M	10	1.00	140	6.55	5.0
WIV3225-221K	220	±10%	0.5V/1M	10	1.00	115	8.23	4.0
WIV3225-331K	330	±10%	0.5V/1M	10	1.00	98	13.7	2.8
WIV3225-471K	470	±10%	0.5V/1M	10	1.00	86	18.1	2.6
WIV3225-681K	680	±10%	0.5V/1M	10	1.00	76	22.0	2.3

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

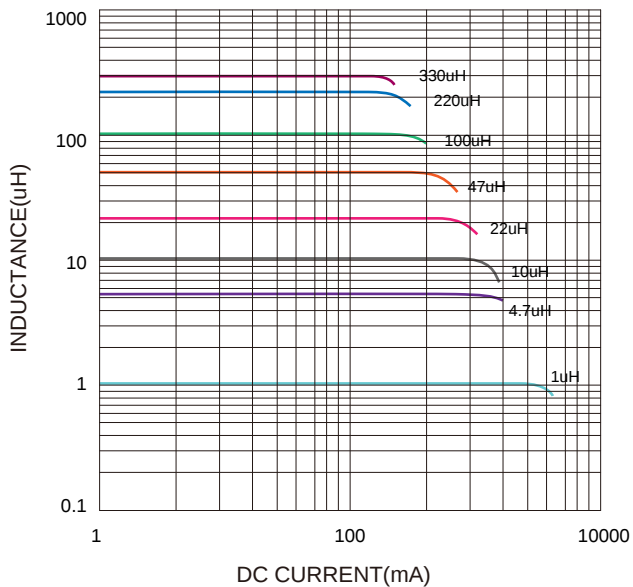

Impedance VS. Frequency Characteristics:

