

MDA Series

SMD Low Profile High Current Molded Inductor
Size 1870



Electrical Properties:


















MDA1870-220M	22.0	±20%	13.5	11.5	13.5	11.5	20.5	24.0
MDA1870-330M	33.0	±20%	12.0	10.0	12.0	10.0	32.0	37.0
MDA1870-470M	47.0	±20%	9.5	8.0	9.5	8.0	40.0	47.0
MDA1870-680M	68.0	±20%	8.0	6.5	8.5	7.2	66.0	76.0
MDA1870-820M	82.0	±20%	6.5	5.7	8.0	6.5	69.0	83.0

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$


Typical Electrical Characteristics:

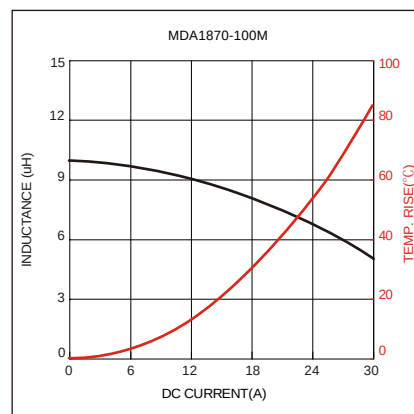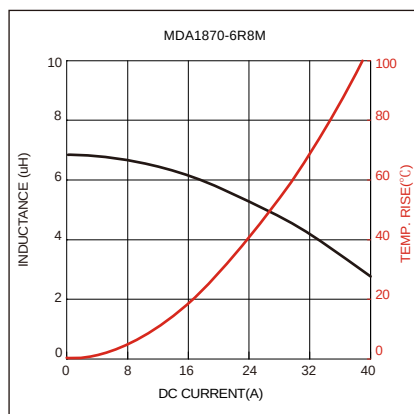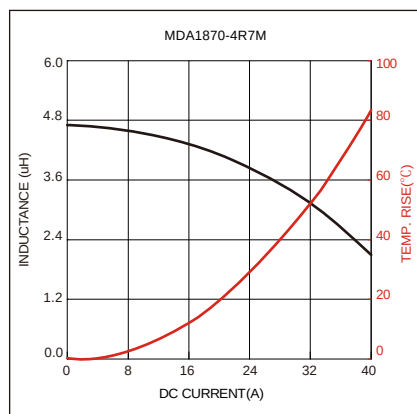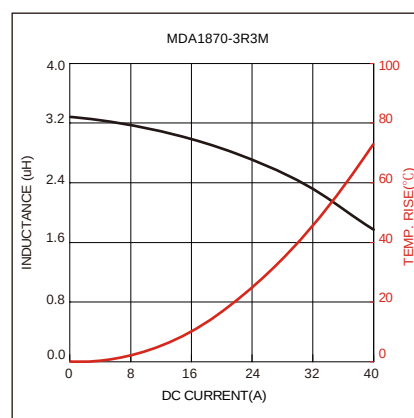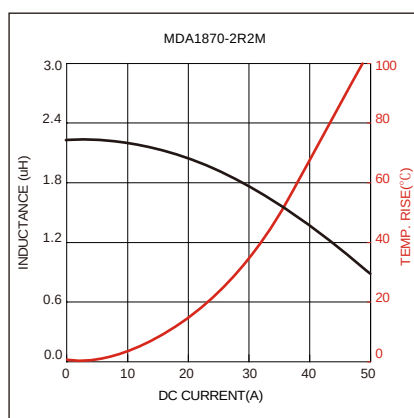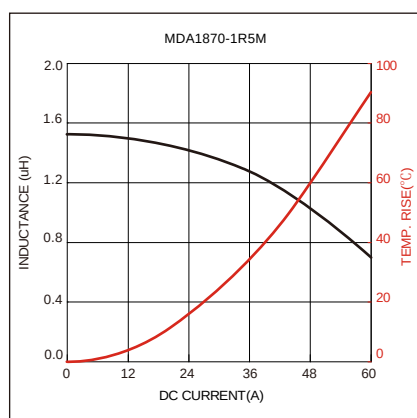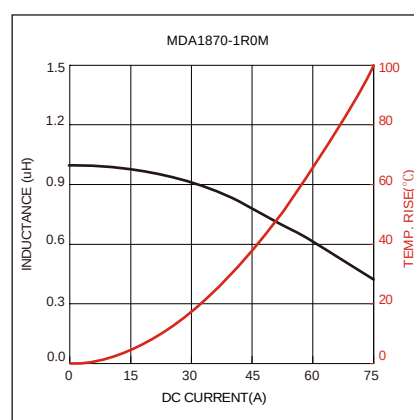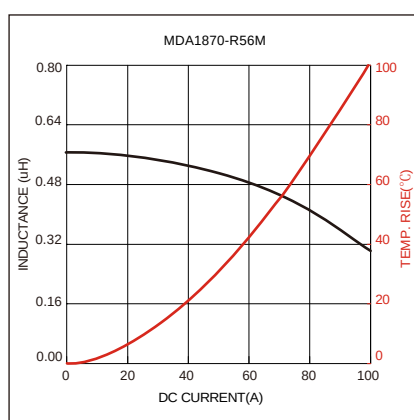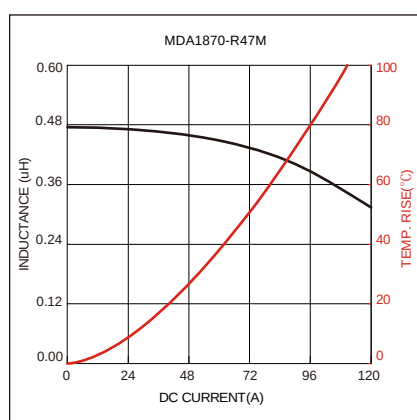

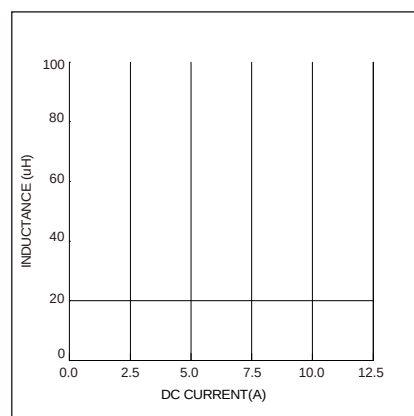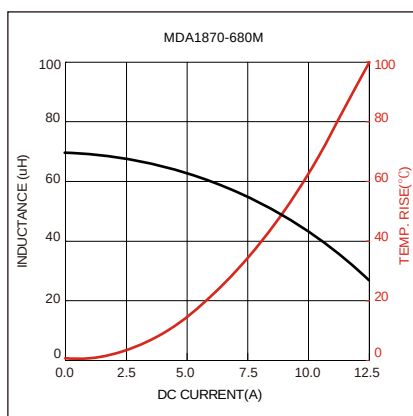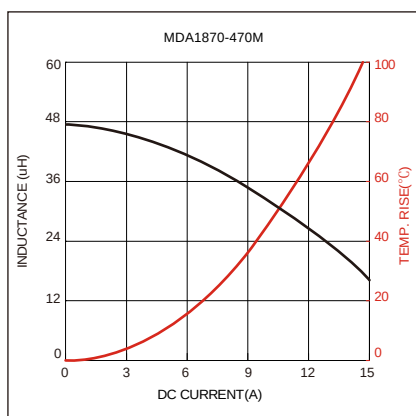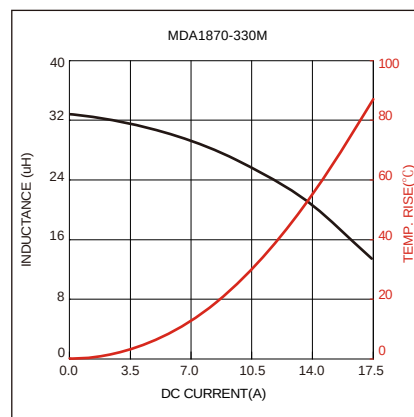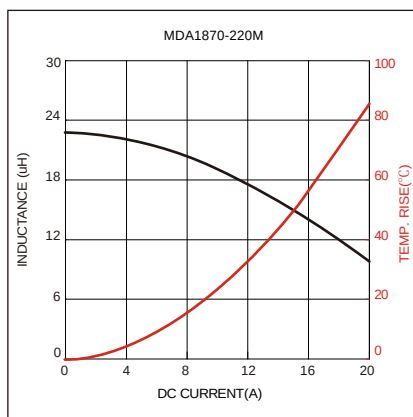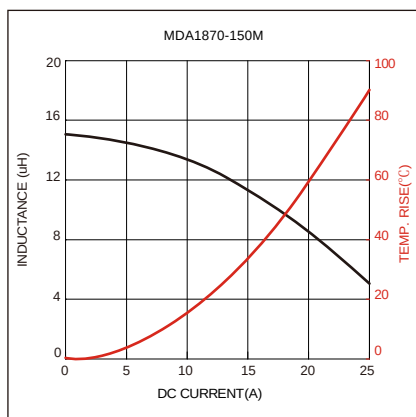




Soldering Reflow:

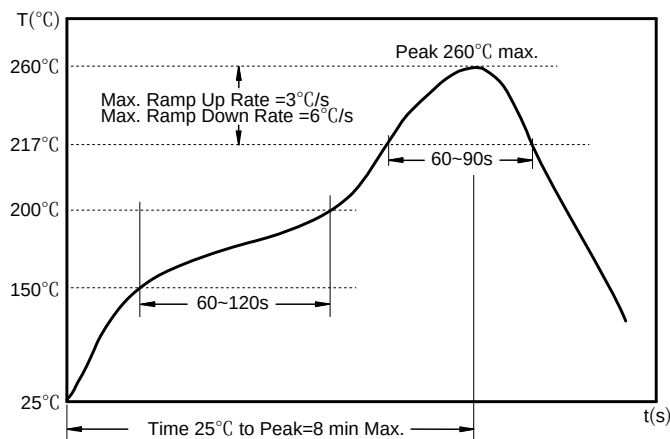

Preheat condition: 150 ~200°C/ 60~120 sec.
 Allowed time above 217°C: 60~90 sec.
 Max temperature: 260°C.
 Max time at max temperature: 10 sec.
 Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

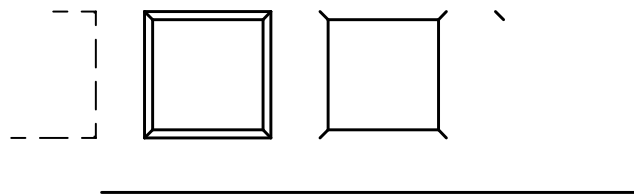

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDA1870	17.5 ± 0.1	18.1 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	24.0 ± 0.1	32.0 ± 0.3	7.3 ± 0.1	1.75 ± 0.1	0.50 ± 0.05

Peel force of top cover tape:

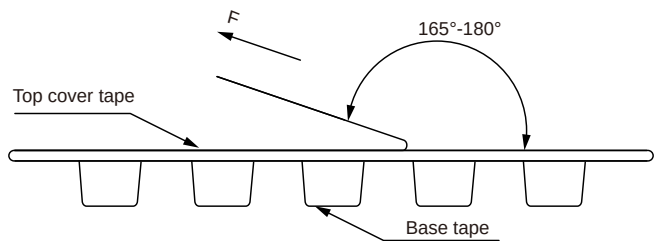


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:


Marking	KH+Printing Inductance+period)
---------	--------------------------------



Reel Dimension : [mm]

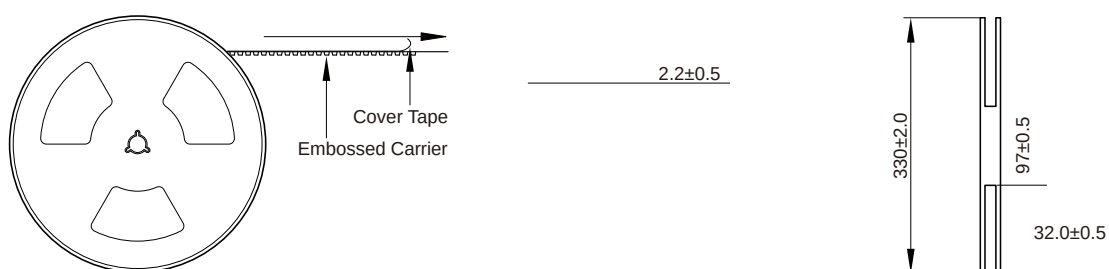

Packaging Quantity:

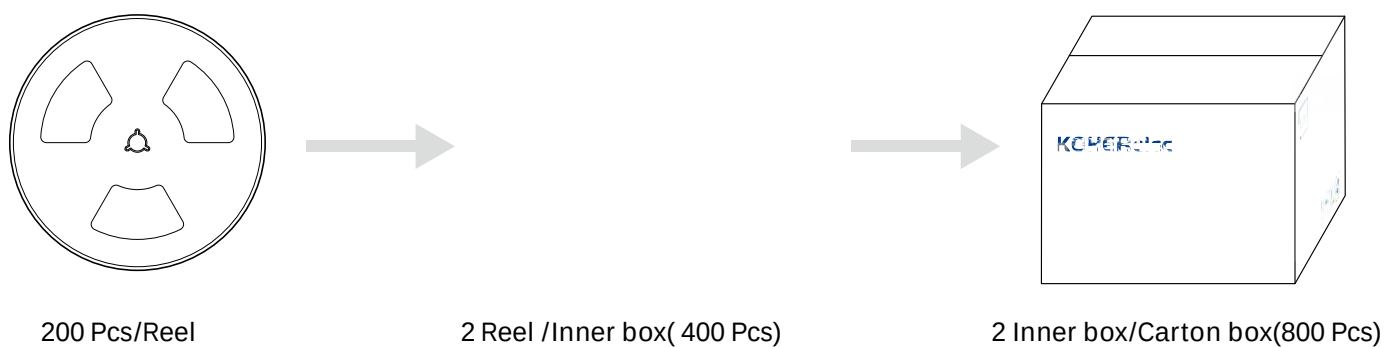

Cautions and Warnings:

Storage Conditions :

-

Operation Instructions: